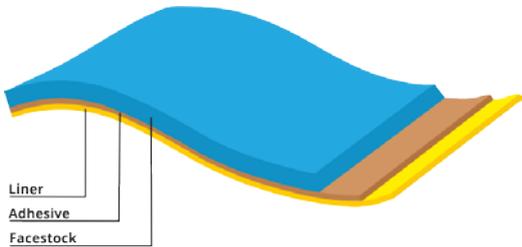


Technical Specification

<p>Face Material</p> <p>White semi-gloss wood-free machine-coated paper.</p> <p>Basis weight, ISO536: 80 g/m²</p> <p>Caliper, ISO534: 69 μm</p>	<p>Product Code</p> <p>GelioLabel SA P80/A110P/Y58</p>			
<p>Adhesive</p> <p>Water-based permanent acrylic pressure-sensitive adhesive. Clear, UV resistant. Provides high initial tack and superior Peel adhesion 90°. Once applied becomes highly resistant to high temperatures and sunlight.</p> <p>Ensures high adhesion even for non-polar surfaces.</p> <p>Initial tack, FTM 9 (glass): 15 N/25 mm</p> <p>Final adhesion, FTM 2 (90): 8 N/25 mm</p> <p>Minimal application temperature: +5 °C</p> <p>Operating temperature: -20...+80 °C</p>	<p>Description</p> <p>White semi-gloss paper with general purpose permanent acrylic adhesive on yellow supercalendered glassine paper.</p> 			
<p>Liner</p> <p>Yellow Glassine</p> <p>Basis weight, ISO536: 58 g/m²</p> <p>Caliper, ISO534: 51 μm</p>	<table border="1"> <tr> <td>Semi-gloss paper</td> </tr> <tr> <td>Adhesive A110P</td> </tr> <tr> <td>Glassine Y58</td> </tr> </table>	Semi-gloss paper	Adhesive A110P	Glassine Y58
Semi-gloss paper				
Adhesive A110P				
Glassine Y58				
<p>Ready Laminate</p> <p>Overall caliper, ISO 534: 140 μm +/- 10%</p>	<p>Shelf Life: 12 months</p> <p>The product should be stored in a cool dry place, at a temperature of 20°C to 25°C and relative humidity of 40%-50% (regulated by FINAT standard).</p> <p>The materials should not be stored near heating sources. Avoid exposure to direct sunlight.</p> <p>Allow at least 24 hours for acclimatization in print shop conditions.</p> <p>It is recommended to hermetically pack ready products and remainder of materials in polyethylene film to ensure protection against moisture during storage and transportation.</p>			
<p>Use</p> <p>Used for labeling food products, household detergents, etc., including cool surfaces.</p>				
<p>Processing and Printing</p> <p>The material can be used in the following kinds of printing: flexographic, letterpress, offset, gravure, and screen. It is recommended for UV, water and solvent-based inks.</p>				

The manufacturer is not responsible for the material quality should the consumer violate the storage and packing conditions.

The data contained in the specification is based on our experience of producing and using the product.

The general characteristics of the materials and adhesive layer are based on ISO and FINAT testing.

Any reference to product use is based on our knowledge and does not suggest any guarantees.

It is up to the consumer to decide whether this material meets their requirements, production and operation conditions.