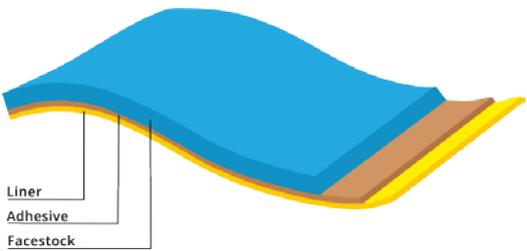
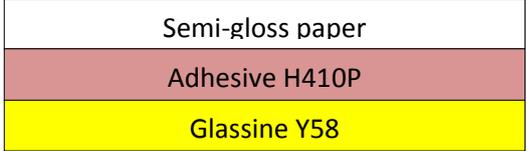


## Technical Specification

<p><b>Face Material</b></p> <p>White semi-gloss wood-free machine-coated paper.</p> <p>Basis weight, ISO536: 80 g/m<sup>2</sup></p> <p>Caliper, ISO534: 69 μm</p>	<p><b>Product Code</b></p> <p><b>GelioLabelSAP80/H410P/Y58</b></p>
<p><b>Adhesive</b></p> <p>Permanent rubber-based hot-melt pressure-sensitive adhesive. Clear, UV resistant. Ensures instant tack. Is recommended in particular for using in cool conditions, on damp surfaces (for instance, surfaces with condensate). Once applied provides superior operational indicators in low temperatures.</p> <p>Initial tack, FTM 9 (glass): 17 N/25 mm</p> <p>Final adhesion, FTM 2 (90): 11 N/25 mm</p> <p>Minimal application temperature: 0 °C</p> <p>Operating temperature: -40...+70 °C</p>	<p><b>Description</b></p> <p>White semi-gloss machine coated paper with general purpose permanent rubber-based adhesive on yellow supercalendered glassine paper.</p> 
<p><b>Liner</b></p> <p>Yellow Glassine</p> <p>Basis weight, ISO536: 58 g/m<sup>2</sup></p> <p>Caliper, ISO534: 51 μm</p>	
<p><b>Ready Laminate</b></p> <p>Overall caliper, ISO 534: 140 μm +/- 10%</p>	<p><b>Shelf Life: 12 months</b></p> <p>The product should be stored in a cool dry place, at a temperature of 20°C to 25°C and relative humidity of 40%-50% (regulated by FINAT standard).</p> <p>The materials should not be stored near heating sources. Avoid exposure to direct sunlight.</p> <p>Allow at least 24 hours for acclimatization in print shop conditions.</p> <p>It is recommended to hermetically pack ready products and remainder of materials in polyethylene film to ensure protection against moisture during storage and transportation.</p>
<p><b>Use</b></p> <p>Can be used for labeling food products, household detergents, etc., including on cooled and frozen surfaces.</p>	
<p><b>Processing and Printing</b></p> <p>The material can be used in the following kinds of printing: flexographic, letterpress, offset, gravure, and screen. It is recommended for UV, water and solvent-based inks.</p>	

The manufacturer is not responsible for the material quality should the consumer violate the storage and packing conditions.

The data contained in the specification is based on our experience of producing and using the product.

The general characteristics of the materials and adhesive layer are based on ISO and FINAT testing.

Any reference to product use is based on our knowledge and does not suggest any guarantees.

It is up to the consumer to decide whether this material meets their requirements, production and operation conditions.